


**SK60****THERMO-STOVES**

mm 680x660xh1080

CE EN -13240 certification

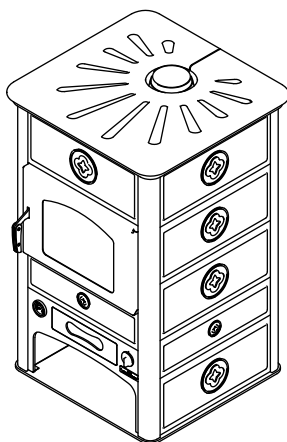


SK60

Ceramic tiles white, bordeaux, ground

**STANDARD EQUIPMENT**

- above flue  $\varnothing$  150 mm
- safety heat exhaust outfitted for connection to a close circuit
- pump thermostat
- primary air thermostatic regulation
- external flue air

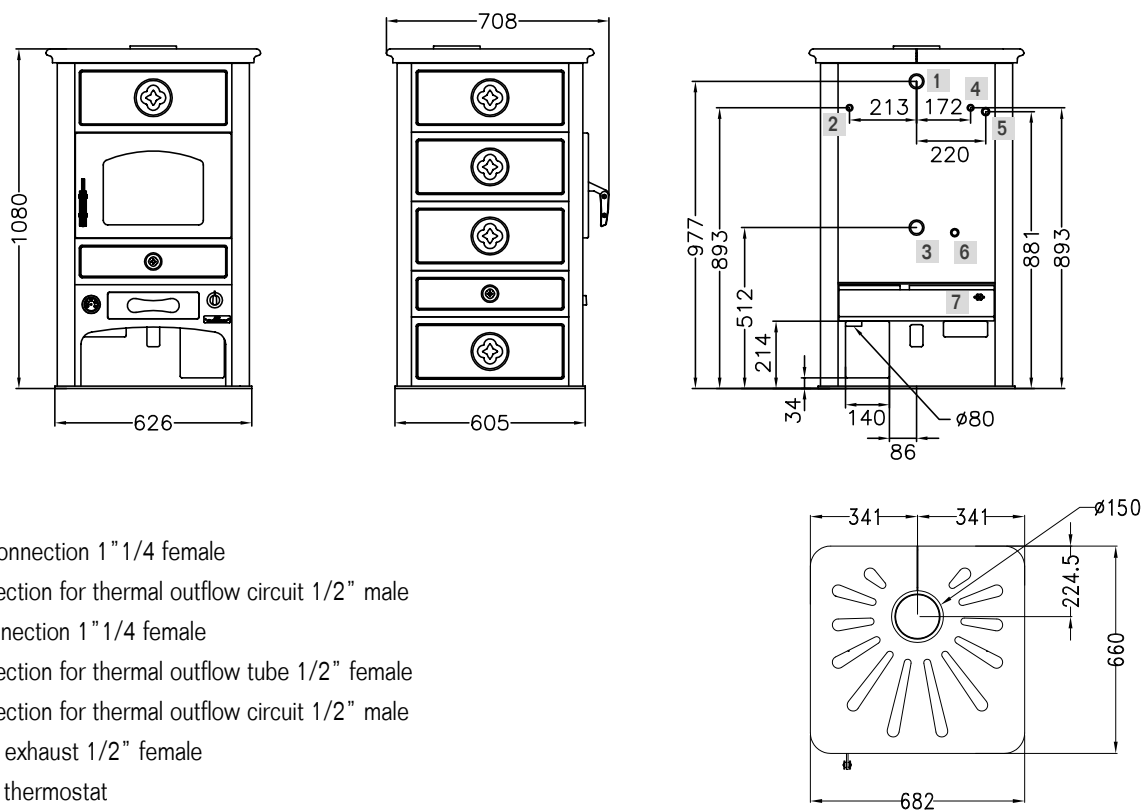**DATA SHEET**

Nominal heat output (max): 13.9 (24.5) kw

Nominal water heat output (max): 12.5 (20.5) kw

Mean content of CO to 13% O<sub>2</sub>: 0.06 %

Efficiency: 85.2 %

Maximum operating pressure: 2.5 bar

Boiler capacity: 26.5 Lt

Firebox capacity (LxPxH): 33x36x45 cm

Fill opening (LxH): 35x25 cm

Mean flue gas temperature: 200 °C

Flue gas mass flow: 12.9 g/s

Flue depression: mbar 0.12

Net weight/packaging included: kg 310/330